

PDF code of
a blank A4 page
created with Microsoft Word
viewed as plain text



%PDF-1.3
%ç÷çþ
%QDF-1.0

```
%% Original object ID: 12 0
1 0 obj
<<
  /Pages 3 0 R
  /Type /Catalog
>>
endobj
```

```
%% Original object ID: 1 0
2 0 obj
<<
  /AAPL:Keywords 4 0 R
  /CreationDate 5 0 R
  /Creator 6 0 R
  /Keywords 7 0 R
  /ModDate 5 0 R
  /Producer 8 0 R
  /Title 9 0 R
>>
endobj
```

```
%% Original object ID: 3 0
3 0 obj
<<
  /Count 1
  /Kids [
    10 0 R
  ]
  /MediaBox [
    0
    0
    595.2756
    841.8898
  ]
  /Type /Pages
>>
endobj
```

```
%% Original object ID: 23 0
4 0 obj
[
]
endobj
```

```
%% Original object ID: 21 0
5 0 obj
(D:20180103001522Z00'00')
endobj
```

```
%% Original object ID: 20 0
6 0 obj
(Word)
endobj
```

```
%% Original object ID: 22 0
7 0 obj
()
endobj
```

```
%% Original object ID: 19 0
8 0 obj
(Mac OS X 10.12.6 Quartz PDFContext)
endobj
```

```
%% Original object ID: 18 0
9 0 obj
(Microsoft Word - Dokument4)
endobj
```

```
%% Page 1
%% Original object ID: 2 0
10 0 obj
<<
  /Contents 11 0 R
  /MediaBox [
    0
    0
    595.2756
    841.8898
  ]
  /Parent 3 0 R
  /Resources 13 0 R
  /Type /Page
>>
endobj
```

```
%% Contents for page 1
%% Original object ID: 4 0
11 0 obj
<<
  /Length 12 0 R
>>
stream
q Q q 12.4724 12.4724 570.3307 816.9449 re W n /Cs1 cs 0 0 0 sc
q 0.24 0 0 0.24 71.2724 759.0973
cm BT 50 0 0 50 0 0 Tm /TT2 1 Tf (!) Tj ET Q q
endstream
endobj
```

```
12 0 obj
145
endobj
```

```
%% Original object ID: 6 0
13 0 obj
<<
  /ColorSpace <<
```

```

    /Cs1 14 0 R
  >>
  /Font <<
    /TT2 15 0 R
  >>
  /ProcSet [
    /PDF
    /Text
  ]
>>
endobj

%% Original object ID: 7 0
14 0 obj
[
  /ICCBased
  16 0 R
]
endobj

%% Original object ID: 9 0
15 0 obj
<<
  /BaseFont /TYCNEB+Calibri
  /FirstChar 33
  /FontDescriptor 18 0 R
  /LastChar 33
  /Subtype /TrueType
  /ToUnicode 19 0 R
  /Type /Font
  /Widths [
    226
  ]
]
>>
endobj

%% Original object ID: 10 0
16 0 obj
<<
  /Alternate /DeviceRGB
  /N 3
  /Length 17 0 R
>>
stream

HLino   mntrRGB XYZ Î           1  acspMSFT   IEC sRGB
öÖ      Ö-HP
cprt   P      3desc      lwtpt   ö      bkpt      rXYZ
gXYZ   ,      bXYZ     @      dmnd   T      pdmdd   Ä      vued   L      view
Ö      $lumi   ø      meas
      $tech   0
rTRC   <
gTRC   <

```



```
endstream
endobj

%QDF: ignore_newline
17 0 obj
3144
endobj

%% Original object ID: 13 0
18 0 obj
<<
  /Ascent 952
  /AvgWidth 521
  /CapHeight 644
  /Descent -269
  /Flags 4
  /FontBBox [
    -503
    -307
    1240
    1026
  ]
  /FontFile2 21 0 R
  /FontName /TYCNEB+Calibri
  /ItalicAngle 0
  /MaxWidth 1328
  /StemV 0
  /Type /FontDescriptor
  /XHeight 476
>>
endobj

%% Original object ID: 14 0
19 0 obj
<<
  /Length 20 0 R
>>
stream
/CIDInit /ProcSet findresource begin
12 dict begin
begincmap
/CIDSystemInfo <<
  /Registry (Adobe)
  /Ordering (UCS)
  /Supplement 0
>> def
/CMapName /Adobe-Identity-UCS def
/CMapType 2 def
1 begincodespacerange
<00><FF>
endcodespacerange
1 beginbfrange
<21><21><0009>
```

```
endbfrange
endcmap
CMapName currentdict /CMap defineresource pop
end
end
endstream
endobj
```

```
20 0 obj
342
endobj
```

```
%% Original object ID: 16 0
```

```
21 0 obj
<<
```

```
  /Length1 652
  /Length 22 0 R
```

```
>>
```

```
stream
```

```
true      cmap      `      glyf      èhead      ü      6hhea
4 $hmtx    cmap      X      loca      |      maxp      Ü      name
l      í      4'@ #
Ã      /
ì 6      ýÚ      )Èd_ <õ      »ë|ì      ÑÊGúúý
  úúú      ì
  ï
```

```
!      t t      ps 0
  9 M N      !      !
  #" . 5'&6332> 54&#"
  #" . 5467> 32
  #" . 54> 32      òüz Óý ~#?V3      -<% S[%<.      (7B"KLE"Ú
ýÚ
úò
úC lú ;\?$
  .      *;!IV
```


```
(D\ý      ýM
  TYCNEB+Calibri
endstream
endobj
```

```
%QDF: ignore_newline
```

```
22 0 obj
652
endobj
```

```
xref
0 23
0000000000 65535 f
0000000053 00000 n
0000000134 00000 n
0000000313 00000 n
0000000470 00000 n
0000000518 00000 n
0000000588 00000 n
0000000639 00000 n
0000000686 00000 n
0000000767 00000 n
0000000849 00000 n
0000001047 00000 n
0000001249 00000 n
0000001297 00000 n
0000001453 00000 n
0000001522 00000 n
0000001736 00000 n
0000004990 00000 n
0000005040 00000 n
0000005351 00000 n
0000005750 00000 n
0000005799 00000 n
0000006545 00000 n
trailer <<
  /Info 2 0 R
  /Root 1 0 R
  /Size 23
  /ID
[<7d0fd7b46c27f01876cbf9ddaa3b671f><59cc7e3fdb4e84126afbf559614
f438>]
>>
startxref
6566
%%EOF
```

"It is important to remember that PDF is a binary file format. It may look like text; but, it is not. And no one should be under the illusion that it can be edited like text. Editing a PDF file as if it were a text file will corrupt the PDF file."

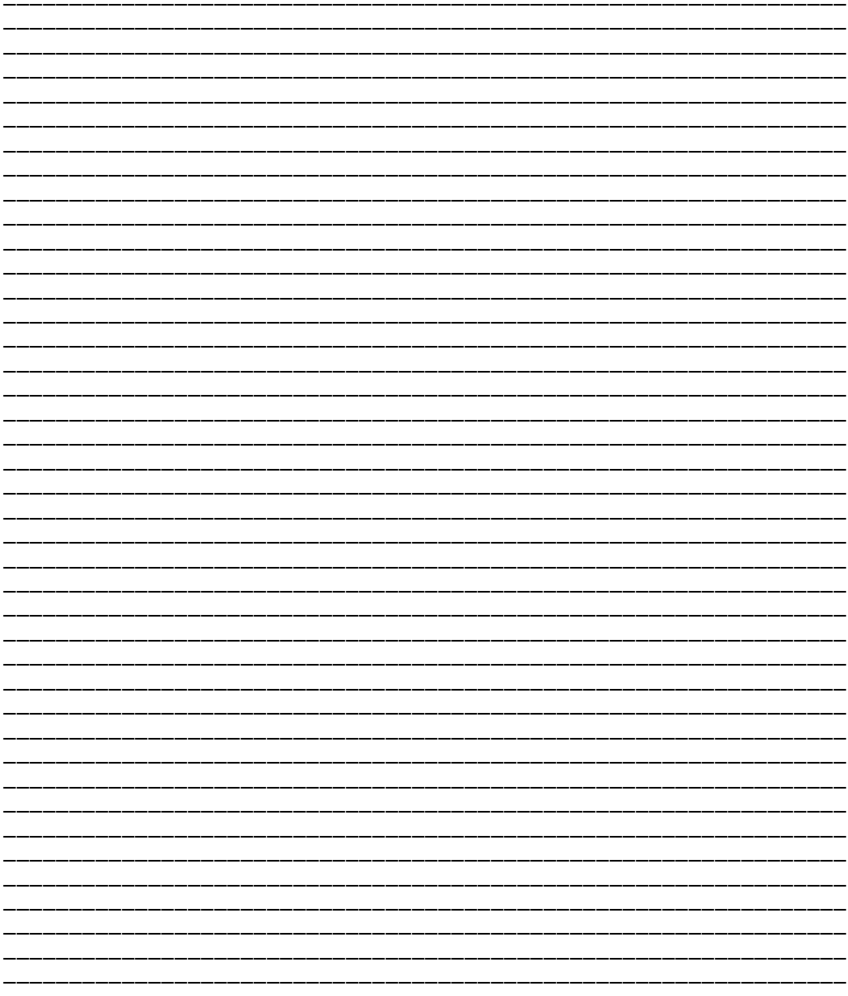

180126ab_sync_04_A4plain.pdf

